


PLUTONE PF

Colour: inside white, outside red with white identification stripe

Temperature range: -35°C + 100°C -30°F + 212°F

Features: food grade PP/EPDM hose reinforced by steel wire and high tenacity polyester yarn. Very flexible, light and easy to handle. High resistance to weather, ageing. Due to its special compound grants safety in use, maximum hygiene and environment protection (recyclable). Allows vapour sterilization.

Application: suction and delivery of alimentary products (no fatty foods) and liqueurs up to a maximum alcoholic content of 50%. Meets EC Directives and Regulations*.

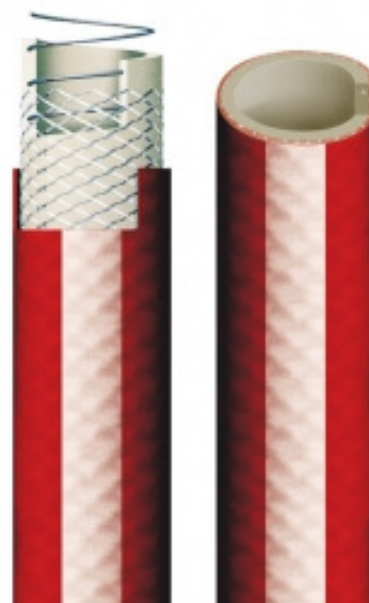

* Please contact our offices for more information

| Inside Ø | Outside Ø | Weigh | Working Pressure | Bursting Pressure | Vacuum | Bending Radius | Roll Length | Volume |
|----------|-----------|-------|------------------|-------------------|--------|----------------|-------------|----------------|
| mm | mm | g/m | bar | bar | mH2O | mm | m | m ³ |
| 25 | 35 | 540 | 10 | 30 | 9,5 | 100 | 60 | 0,135 |
| 32 | 43 | 730 | 10 | 30 | 8,5 | 130 | 60 | 0,214 |
| 38 | 49 | 850 | 10 | 30 | 8,5 | 150 | 30 | 0,228 |
| 40 | 51 | 890 | 10 | 30 | 8,5 | 160 | 30 | 0,223 |
| 50 | 63 | 1390 | 10 | 30 | 8 | 250 | 30 | 0,286 |
| 63 | 77 | 1820 | 10 | 30 | 8 | 320 | 30 | 0,372 |
| 76 | 91 | 2260 | 10 | 30 | 7 | 380 | 30 | 0,603 |
| 80 | 95 | 2350 | 10 | 30 | 7 | 400 | 20 | 0,498 |
| 102 | 118 | 3280 | 10 | 30 | 7 | 510 | 20 | 0,801 |